
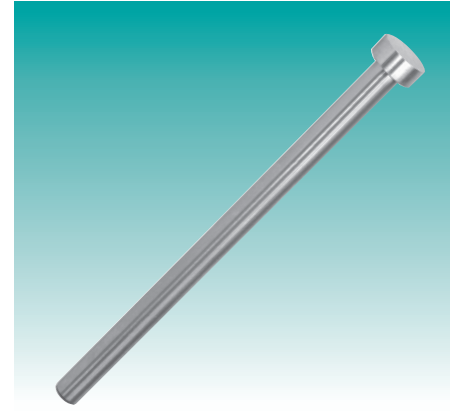


Ejector Pins

Hardened Throughout

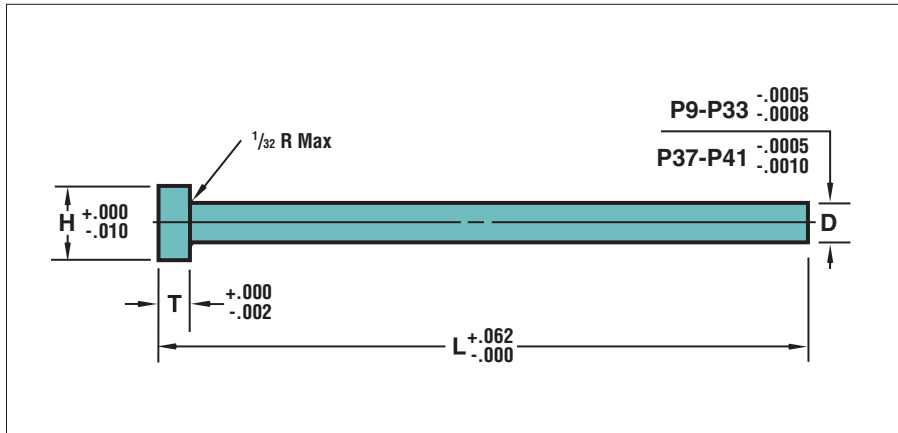

Catalog Number	D Pin Diameter	H Head Diameter	T Head Thickness	L 6"	L 10"	L 14"
P9	.1250	1/4	1/8	•	•	•
P13	.1875	3/8	3/16	•	•	•
P17	.2500	7/16	3/16	•	•	•
P21	.3125	1/2	1/4	•	•	•
P25	.3750	5/8	1/4	•	•	•
P29	.4375	11/16	1/4	•	•	•
P33	.5000	3/4	1/4	•	•	•
P37	.6250	7/8	1/4	•	•	•
P41	.7500	1	1/4	•	•	•

HOW TO ORDER

Specify: Qty. Catalog Number L
 Example: 10 P17 10

FDS[®]
 FIRM DELIVERY SCHEDULE
 Next Day

- Surface is hardened to RC 65-70
- Core is hardened to RC 50-52
- Reduces "dishing" effect common to nitrided pins
- Annealed Heads
- Precision ground to 4-10 micro-inch finish
- Manufactured from premium hotwork steel
- Etched for easy identification



DAYTON PROGRESS CORPORATION • 500 Progress Road • P.O. Box 39 • Dayton, OH 45449-0039 • USA
 Telephone: 937-859-5111 • www.daytonprogress.com • Fax: 937-859-5353